

C 系列沉水式污物（泥）泵

C SERIES SUBMERSIBLE SOLID HANDLING PUMP

NON-CLOG 不堵塞葉輪



ISO 9001, ISO 14001 認證合格



綠色、安全、永續經營

川源股份有限公司

GSD INDUSTRIAL CO., LTD.

簡介

C 系列沉水式污物（泥）泵採獨特之不阻塞葉輪設計，適合各種固體顆粒和纖維污水的抽送，降低了葉輪堵塞的機率。其適用範圍寬，流量為 $0.3 \text{ m}^3/\text{min} \sim 60 \text{ m}^3/\text{min}$ ，出口徑為 $\phi 50\text{mm} \sim \phi 500\text{mm}$ 。特點為效率高、性能穩定、低噪音及低振動，配合自動著脫裝置及水位控制系統，不僅安裝保養容易，亦可依現場實際需求進行自動控制，目前已廣泛用於多種場合。此外，電機冷卻方式可為自冷式，減少因水位變化造成電機的損壞。

用途

- 廢水揚昇站
- 都市廢水處理廠
- 一樓化糞池排水系統
- 農畜牧業廢水處理系統
- 醫院、學校、社區等生活廢水處理系統
- 食品、造紙、採礦、紡織、皮革、化學工廠等工業之水處理系統。
- 淨水處理系統

結購特點

電動機

F 級以上絕緣之乾式鼠籠型感應式電動機，防護等級IP68，可加裝過熱保護裝置，對過載、溫升等狀況自動進行來檢測，延長使用壽命，另可選用防爆型電動機，提高使用的安全。電動機的散熱方式有參種：一為電動機為水套水冷式、另一為電動機加入絕緣冷卻油附設熱交換循環系統，其他則利用周圍的流體強制冷卻。電動機與泵組立完成後均經過嚴格的電腦測試。

不阻塞葉輪

所有葉輪均經平衡校正，運轉平穩；特殊設計使其流道特大，水流順暢污物容易通過，毋慮阻塞或纏繞之情況發生。

泵浦本體

泵體出口處加裝自動排氣閥，避免氣栓現象發生，使抽水系統穩定。

密封機構

電纜組為一體成型或多層防護並添加環氧樹脂密封，機械軸封則是阻絕抽送介質與電機部分接觸。

自動著脫裝置（選用配備）

使泵浦安裝、保養、修護迅速容易，毋須先清除桶槽污水。

測漏檢知器（選用配備）

在油室內加裝測漏檢知器，減少因密封不良或軸封損壞造成之洩漏。

INTRODUCTION

Non-Clog impeller of C series submersible solid handing pump is specifically designed for transportation of sewage and slurries. It may deliver sewage containing several kinds of solid particles and fibers and keep the impeller from clogging. The delivered capacity may vary from $0.3 \text{ m}^3/\text{min}$ to $60 \text{ m}^3/\text{min}$, and the discharge diameter varies from $\phi 50\text{mm}$ to $\phi 500 \text{ mm}$. C series pumps are high-efficiency, stable, trouble-free, long service life, low noise and vibration. The auto-setter can make installation and maintenance easier and equip with the level control system may keep the operation automatically. The cooling of the motor casing could be using cooling jacket to prevent the motor from damage because of the rapid change of liquid level.

APPLICATIONS

- Wastewater lift station
- Municipal wastewater treatment plant
- Building wastewater treatment system
- Animal & poultry farm wastewater treatment system
- Hospital, school, community etc. wastewater treatment system
- Food, paper, mining, textile, leather, chemical industry etc. wastewater treatment system
- Water purification system

FEATURES

MOTOR

Squirrel cage, including motors are F class insulation, and protect level is IP68. The thermal protector is optional to secure the protection of motor against overload and overheating, and the explosion proof motor is also optional. The cooling of the submersible motor has two types: using cooling jacket and using the surrounding liquid to force cooling. All motors and pumps are strictly tested by computer testing system.

NON-CLOG IMPELLER

Well balanced Non-Clog impeller is designed to allow sizable spherical solids to pass the plow passage easily without clogging.

PUMP CASING

Fitted with vent valve at discharge side of pump casing to avoid air lock ensuring pumping system in steady operation.

SEAL MECHANISM

The cable assembly is either formed to one piece or multiple sealing and the wires are potted with epoxy resin. The mechanical seals prevent the motor from contacting the pumping liquid.

AUTO-SETTER (OPTIONAL)

To allow pump for easy installation, maintenance & reparation, as it is no need to empty the tank first.

LEAKAGE DETECTOR (OPTIONAL)

Built-in leakage detector in the oil chamber can prevent leakage from the damage of the mechanical seal.

型號說明 (TYPE DESCRIPTION)

CP(T)–5(6) 37–300 A

Pole : "A : 6P、B : 8P、C : 10P"
 OUTLET DIAMETER(mm)
 RATED POWER(KW)
 FREQUENCY : "5 : 50Hz、6 : 60Hz"
 CP : STANDARD TYPE
 CT : WITH AUTO SETTER

極 數
 出口口徑
 額定功率
 頻 率
 標準型式
 蓄脫型式

污物通過選擇表 (Selection of Solid Handling)

Units : mm

Model 型 式	Diameter 口 徑	2"	3"	4"	6"	8"	10"	12"	14"	16"	20"
		50A	80A	100A	150A	200A	250A	300A	350A	400A	500A
污物直徑 Diameter of waste (Including Granule and Blocks)		≤ 35	≤ 56	≤ 63	≤ 72	≤ 90	≤ 113	≤ 130	≤ 150	≤ 200	≤ 220
帶狀長度 (含纖維片狀物質) Length of Belt-Shaped Wastes (Including Fiber, Piecegoods)		120	190	240	320	360	400	450	500	520	550

上述污物直徑為 4P 時可通過直徑，如為 6P 時可通過直徑× 1.2 倍，8P 時可通過直徑× 1.4 倍



規格表 (SPECIFICATIONS)

機 型	口徑 (mm)	輸出 (kw)	極數 (Pole)	揚程 (m)	流量 (m³/min)	機 型	口徑 (mm)	輸出 (kw)	極數 (Pole)	揚程 (m)	流量 (m³/min)
CP(T)-5(6)0.75-50	50	0.75	4	8	0.2	CP(T)-5(6)30-250	250	30	4	16	7
CP(T)-5(6)1.5-80	80	1.5	4	7	0.5	CP(T)-5(6)37-250	250	37	4	19	7.5
CP(T)-5(6)2.2-80	80	2.2	4	8	0.7	CP(T)-5(6)45-250	250	45	4	22	7.5
CP(T)-5(6)3.7-80	80	3.7	4	12.5	0.8	CP(T)-5(6)55-250	250	55	4	30	7
CP(T)-5(6)5.5-80	80	5.5	4	18	0.8	CP(T)-5(6)75-250	250	75	4	40	7
CP(T)-5(6)7.5-80	80	7.5	4	22	0.8	CP(T)-5(6)30-300A	300	30	6	10.5	11
CP(T)-5(6)3.7-100	100	3.7	4	7	1.6	CP(T)-5(6)37-300A	300	37	6	13	10
CP(T)-5(6)5.5-100	100	5.5	4	11	1.6	CP(T)-5(6)45-300A	300	45	6	15	10
CP(T)-5(6)7.5-100	100	7.5	4	15	1.6	CP(T)-5(6)55-300A	300	55	6	19	10.5
CP(T)-5(6)11-100	100	11	4	21.5	1.6	CP(T)-5(6)75-300A	300	75	6	24.5	11
CP(T)-5(6)15-100	100	15	4	26.5	1.6	CP(T)-5(6)30-350A	350	30	6	7	16
CP(T)-5(6)19-100	100	18.5	4	31	1.6	CP(T)-5(6)37-350A	350	37	6	8	16
CP(T)-5(6)7.5-150	150	7.5	4	10	2.5	CP(T)-5(6)45-350A	350	45	6	10	16
CP(T)-5(6)11-150	150	11	4	14	3	CP(T)-5(6)55-350A	350	55	6	12	16
CP(T)-5(6)15-150	150	15	4	16	3	CP(T)-5(6)75-350A	350	75	6	16	16
CP(T)-5(6)19-150	150	18.5	4	21.5	3	CP(T)-5(6)93-350A	350	93	6	17	20
CP(T)-5(6)22-150	150	22	4	25	3	CP(T)-5(6)150-350A	350	150	6	25	25
CP(T)-5(6)7.5-200A	200	7.5	6	6.5	4	CP(T)-5(6)37-400B	400	37	8	7	20
CP(T)-5(6)11-200	200	11	4	9	4.5	CP(T)-5(6)45-400B	400	45	8	9	20
CP(T)-5(6)15-200	200	15	4	12	4.5	CP(T)-5(6)55-400B	400	55	8	12	20
CP(T)-5(6)19-200	200	18.5	4	14	5	CP(T)-5(6)75-400B	400	75	8	12	25
CP(T)-5(6)22-200	200	22	4	16	5	CP(T)-5(6)110-400A	400	110	6	18	25
CP(T)-5(6)30-200	200	30	4	22	5	CP(T)-5(6)150-400A	400	150	6	26	25
CP(T)-5(6)37-200	200	37	4	26	5	CP(T)-5(6)55-500B	500	55	8	7.5	30
CP(T)-5(6)45-200	200	45	4	32	5	CP(T)-5(6)110-500B	500	110	8	12	36
CP(T)-5(6)55-200	200	55	4	38	5	CP(T)-5(6)150-500B	500	150	8	16	40
CP(T)-5(6)22-250A	250	22	6	11.5	7	CP(T)-5(6)220-500B	500	220	8	22	40

上述規格以外之性能、口徑、馬力、極數，可依客戶需求製作


- Motor with other operating voltage, pole are available on request.
- Inquiry of specified performance or specification is welcome.

性能曲線 (PERFORMANCE CURVE)

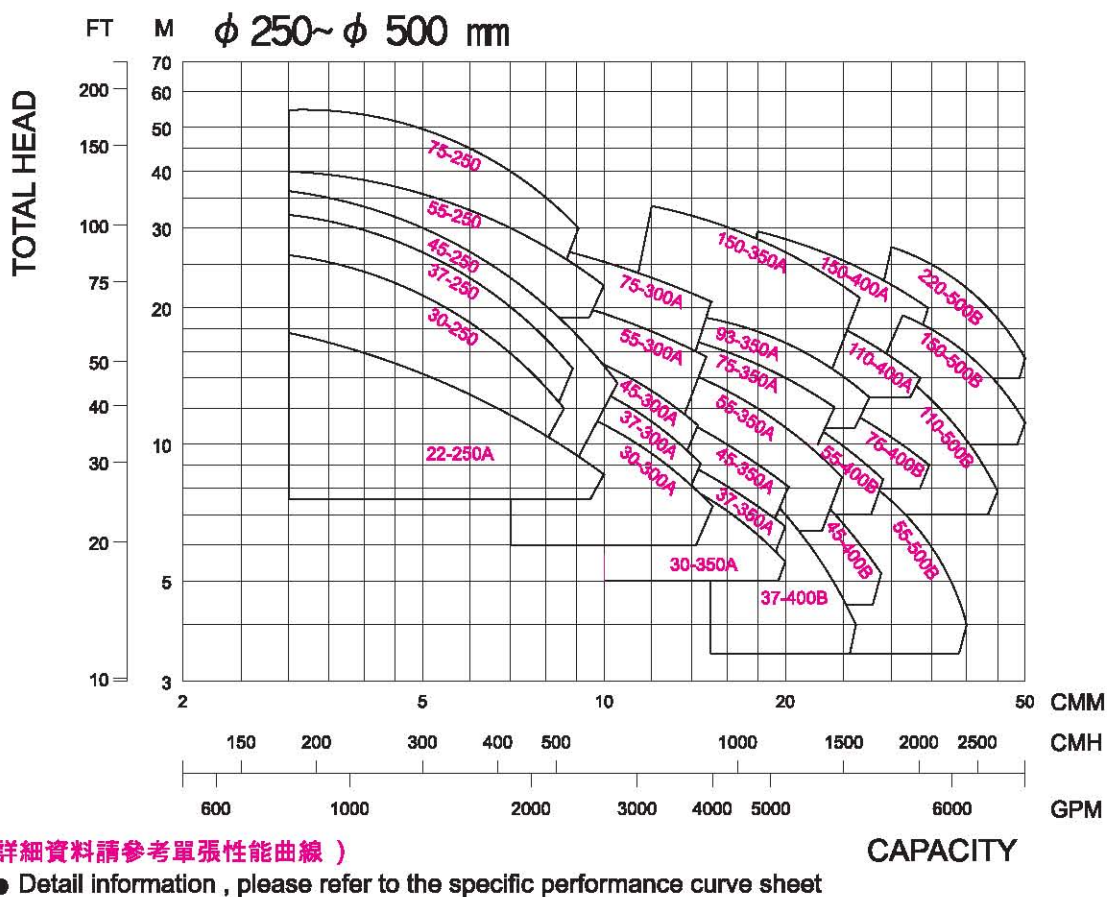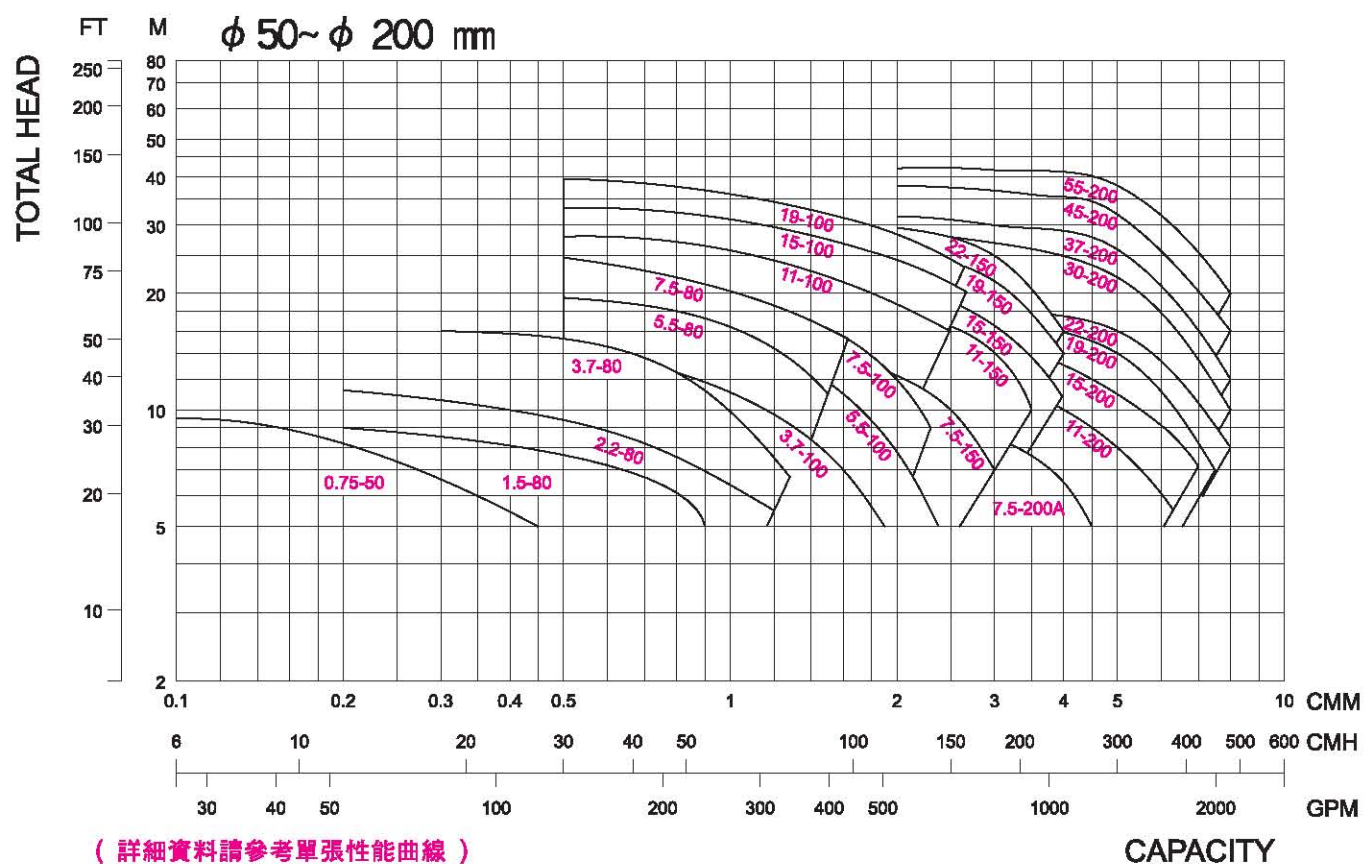


結構圖 (CONSTRUCTION)

電動機爲非水冷式 (Not built — in cooling system)

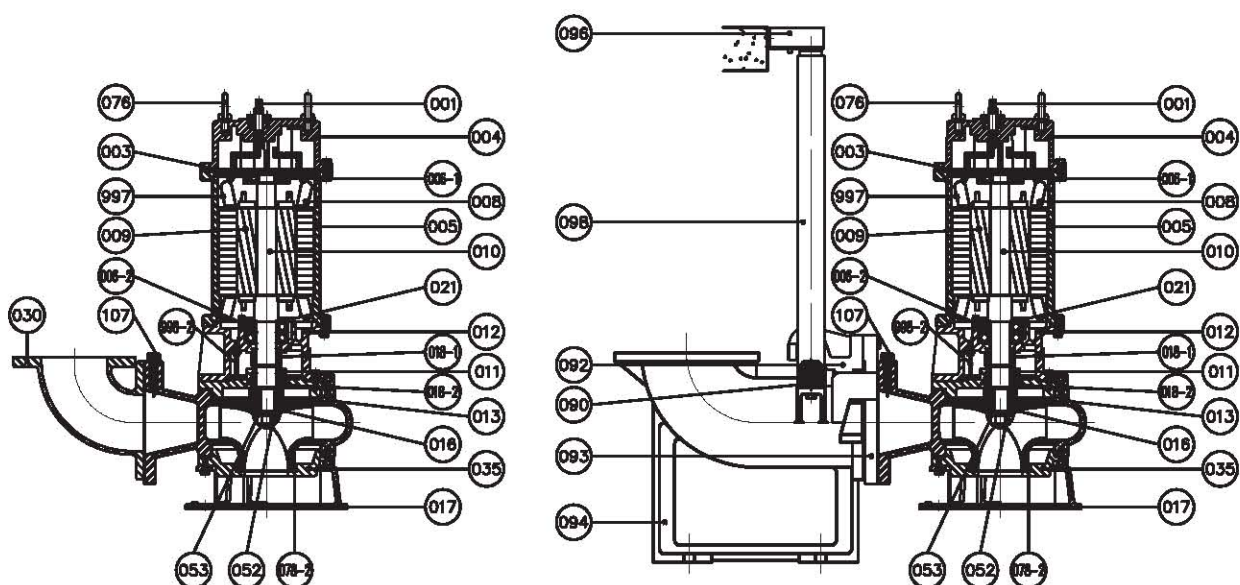

電動機爲水冷式 (Built — in cooling system)

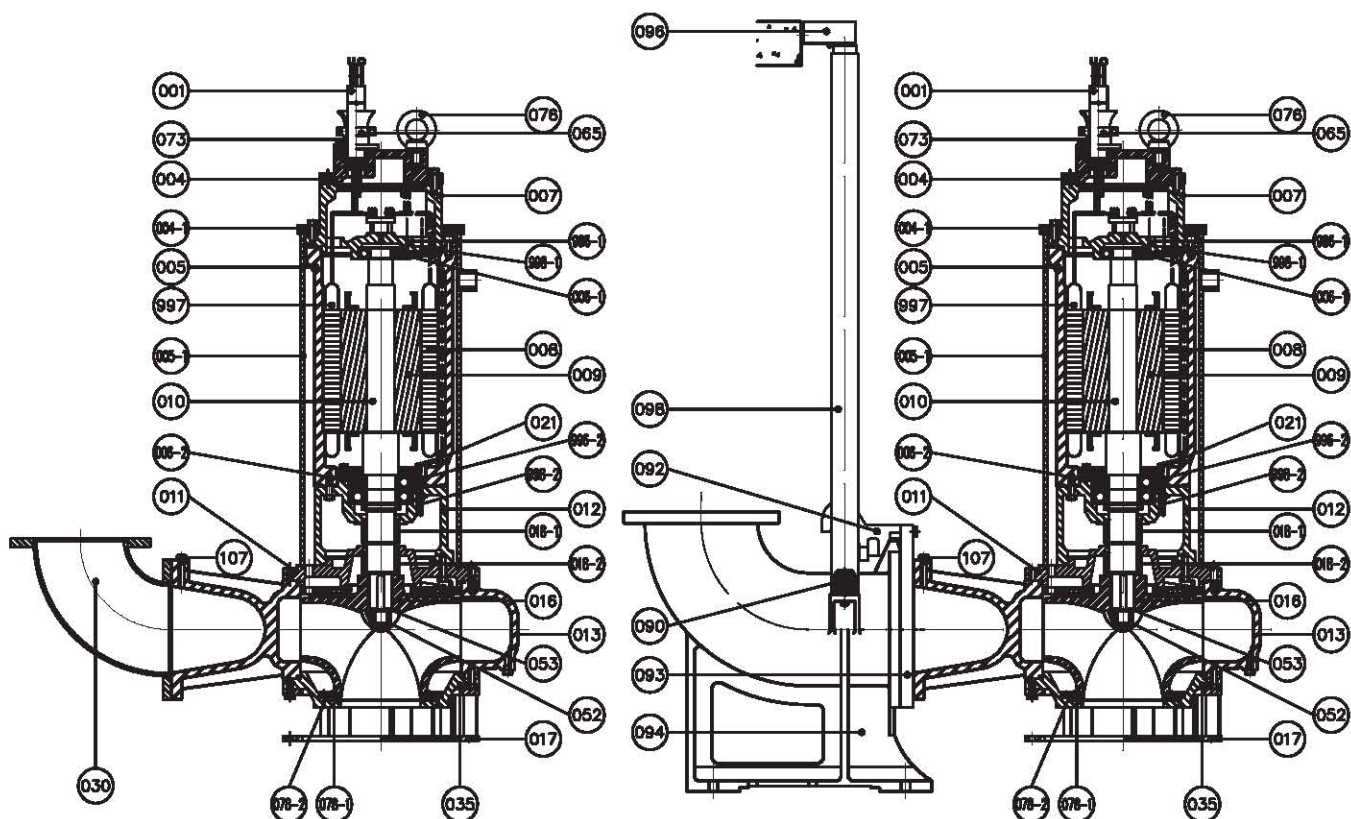

材質表 (MATERIALS)

NO.	名 稱	NAME	MATERIAL			NO.	名 稱	NAME	MATERIAL		
001	電 纜	CABLE	VCT(or 2RNCT)			003	軸 承 座	BEARING COVER	FC200		
004	馬達蓋	MOTOR COVER	FC200	SCS13	SCS14	004-1	外桶壓蓋	CASING PRESS COVER	FC200	SCS13	SCS14
005	馬達本體	MOTOR CASING	FC200	SCS13	SCS14	005-1	馬達外桶	COOLING HOUSING	SS400	SUS304	SUS316
006-1	軸 承	BEARING	NSK(or SKF)			006-2	軸 承	BEARING	NSK(or SKF)		
007	接線座	CABLE COVER	FC200	SCS13	SCS14	008	定 子	STATOR	F CLASS		
009	轉 子	ROTOR				010	主 軸	SHAFT	SUS410	SUS316	SUS316
011	油箱蓋	OIL COVER	FC200	SCS13	SCS14	012	中承座	BRACKET	FC200	SCS13	SCS14
013	泵浦本體	PUMP CASING	FC200	SCS13	SCS14	016	葉 輪	IMPELLER	FC200	SCS13	SCS14
017	濾底座	SCREEN	FC200 SS400	SCS13 SUS304	SCS14 SUS316	018-1	機械軸封	MECHANICAL SEAL	CARBON-NBR		
018-2	機械軸封	MECHANICAL SEAL	Silicon-NBR SIL-VITON			021	軸 承 蓋	BEARING COVER	FC200		
030	彎 頭	DISCHARGE BEND	FC200 SS400	SCS13 SUS304	SCS14 SUS316	035	泵浦底蓋	BOTTOM COVER	FC200	SCS13	SCS14
052	葉輪螺母	IMPELLER NUT	SUS304			053	止動墊圈	WASHER	SUS304		
065	電纜壓蓋	CABLE COVER	FC200	SCS13	SCS14	073	電纜固定套	CABLE BOX	FC200	SCS13	SCS14
076	環首螺栓	NECK BOLT	SS400	SUS304		078-1	磨耗環	WEAR RING	鍍鉻		
078-2	磨耗環	WEAR RING	鍍鉻	依稀龍		090	固定栓	BOLT	FC200		
092	引 導 板	SLIDE	FC200	SCS13	SCS14	093	配合凸緣	FLANGE SETTER	FC200	SCS13	SCS14
094	著脫本體	DUCKFOOT	FC200	SCS13	SCS14	096	固定板	GUIDE SUPPORT	SS400		
098	著脫導桿	RAIL PIPING	SGP : SUS304			107	排氣閥	VENT VALVE	PP		
996-1	上軸承溫度偵測器	BEARING THERMAL DETECTOR	選擇配備			996-2	下軸承溫度偵測器	BEARING THERMAL DETECTOR	選擇配備		
997	線圈過熱保護裝置	COIL THERMAL PROTECTOR	選擇配備			998-1	測漏檢知器	LEAK DETECTOR	選擇配備		
998-2	測漏檢知器	LEAK DETECTOR	選擇配備								

上述材質以外，可依客戶需求製作

● 098、996、997、998 為選擇配備

● Specified materials are available on request.

尺寸表 (DIMENSIONS)

Units : mm

型式 (TYPE)	FIG	A	B	C	D	E	F	G	H	型式 (TYPE)	FIG	A	B	C	D	E	F	G	H
CP-5(6)0.75-50	×	145	391	497	194	95	×	244	284	CP-5(6)30-250	3	595	1100	1543	585	289	480	1041	1241
CP-5(6)1.5-80	×	242	478	607	280	140	198	423	498	CP-5(6)37-250	3	595	1100	1543	585	289	480	1041	1241
CP-5(6)2.2-80	×	242	518	647	280	140	198	423	498	CP-5(6)45-250	3	595	1100	1543	585	289	480	1041	1241
CP-5(6)3.7-80	1	320	579	805	384	185	260	538	630	CP-5(6)55-250	3	595	1268	1778	585	289	480	1041	1241
CP-5(6)5.5-80	1	320	579	805	384	185	260	538	630	CP-5(6)75-250	3	595	1268	1778	585	289	480	1041	1241
CP-5(6)7.5-80	1	320	579	805	384	185	260	538	630	CP-5(6)30-300A	3	644	1120	1563	670	336	500	1147	1370
CP-5(6)3.7-100	1	312	579	805	384	185	260	570	675	CP-5(6)37-300A	3	644	1120	1563	670	336	500	1147	1370
CP-5(6)5.5-100	1	312	579	805	384	185	260	570	675	CP-5(6)45-300A	3	644	1285	1798	670	336	500	1147	1370
CP-5(6)7.5-100	1	312	579	805	384	185	260	570	675	CP-5(6)55-300A	3	644	1285	1798	670	336	500	1147	1370
CP-5(6)11-100	1	290	645	907	380	175	280	580	685	CP-5(6)75-300A	3	681	1335	1845	786	394	600	1305	1528
CP-5(6)15-100	1	290	645	907	380	175	280	580	685	CP-5(6)30-350A	3	730	1300	1633	670	336	500	1198	1443
CP-5(6)19-100	3	428	843	1214	500	250	350	760	900	CP-5(6)37-350A	3	730	1300	1633	670	336	500	1198	1443
CP-5(6)7.5-150	1	368	594	820	400	205	280	645	785	CP-5(6)45-350A	3	782	1435	1945	800	400	550	1312	1557
CP-5(6)11-150	1	368	690	952	400	205	280	645	785	CP-5(6)55-350A	3	782	1435	1945	800	400	550	1312	1557
CP-5(6)15-150	1	368	690	952	400	205	280	645	785	CP-5(6)75-350A	3	782	1435	1945	800	400	550	1312	1557
CP-5(6)19-150	3	453	880	1251	543	275	400	835	975	CP-5(6)93-350A	3	850	1630	2170	850	425	550	1337	1582
CP-5(6)22-150	3	453	880	1251	543	275	400	835	975	CP-5(6)150-350A	3	950	1750	2300	885	450	600	1412	1657
CP-5(6)7.5-200A	1	518	810	1072	506	250	380	845	1010	CP-5(6)37-400B	3	900	1495	2005	750	360	500	1273	1553
CP-5(6)11-200	1	518	810	1072	506	250	380	845	1010	CP-5(6)45-400B	3	932	1510	2020	800	400	550	1363	1643
CP-5(6)15-200	1	518	810	1072	506	250	380	845	1010	CP-5(6)55-400B	3	932	1510	2020	800	400	550	1363	1643
CP-5(6)19-200	3	518	884	1255	506	250	380	845	1010	CP-5(6)75-400B	3	932	1705	2245	850	425	600	1438	1718
CP-5(6)22-200	3	518	884	1255	506	250	380	845	1010	CP-5(6)110-400A	3	932	1740	2280	800	400	550	1363	1643
CP-5(6)30-200	3	518	1045	1495	506	250	380	845	1010	CP-5(6)150-400A	3	932	1860	2410	850	425	600	1438	1718
CP-5(6)37-200	3	518	1045	1495	506	250	380	845	1010	CP-5(6)55-500B	3	1000	1530	2040	990	500	700	1715	2053
CP-5(6)45-200	3	513	1015	1485	543	275	400	890	1055	CP-5(6)110-500B	3	1390	1760	2300	1215	515	750	1780	2118
CP-5(6)55-200	3	553	1268	1778	585	289	480	984	1149	CP-5(6)150-500B	3	1400	1880	2430	1042	540	750	1805	2143
CP-5(6)22-250A	3	595	1100	1543	585	289	480	1041	1241	CP-5(6)220-500B	3	1400	2000	2550	1042	540	750	1805	2143

尺寸表 (DIMENSIONS)

Units : mm

型式 (TYPE)	FIG	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	略重 kg
CT-5(6)0.75-50	×	310	420	527	194	95	244	135	539	120	150	110	180	30	25A	59	240	140	15	M14	5	24
CT-5(6)1.5-80	×	434	618	747	280	140	263	163	658	180	220	180	226	140	25A	59	240	140	15	M16	5	55
CT-5(6)2.2-80	×	434	658	787	280	140	263	163	658	180	220	180	226	140	25A	59	240	140	15	M16	5	63
CT-5(6)3.7-80	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	122
CT-5(6)5.5-80	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	140
CT-5(6)7.5-80	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	145
CT-5(6)3.7-100	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	120
CT-5(6)5.5-100	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	140
CT-5(6)7.5-100	2	340	589	815	384	185	368	156	814	180	220	180	240	10	40A	65	345	295	25	M16	54	145
CT-5(6)11-100	2	340	675	940	360	175	388	156	824	180	220	180	240	32.5	40A	65	345	295	25	M16	54	190
CT-5(6)15-100	2	340	675	940	360	175	388	156	824	180	220	180	240	32.5	40A	65	345	295	25	M16	54	225
CT-5(6)19-100	4	480	905	1277	500	250	503	285	1203	290	330	300	470	62.5	50A	100	470	400	25	M20	22	420
CT-5(6)7.5-150	2	480	715	942	400	205	433	285	1088	290	330	300	470	122	50A	100	470	400	25	M20	22	180
CT-5(6)11-150	2	480	810	1074	400	205	433	285	1088	290	330	300	470	122	50A	100	470	400	25	M20	22	220
CT-5(6)15-150	2	480	810	1074	400	205	433	285	1088	290	330	300	470	122	50A	100	470	400	25	M20	22	250
CT-5(6)19-150	4	480	915	1289	543	275	553	285	1278	290	330	300	470	37.5	50A	100	470	400	25	M20	22	465
CT-5(6)22-150	4	480	915	1289	543	275	553	285	1278	290	330	300	470	37.5	50A	100	470	400	25	M20	22	480
CT-5(6)7.5-200A	2	480	840	1105	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	230
CT-5(6)11-200	2	480	840	1105	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	260
CT-5(6)15-200	2	480	840	1105	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	280
CT-5(6)19-200	4	480	915	1288	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	485
CT-5(6)22-200	4	480	915	1288	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	500
CT-5(6)30-200	4	480	1080	1528	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	685
CT-5(6)37-200	4	480	1080	1528	506	250	533	285	1233	290	330	300	470	32.5	50A	100	470	400	25	M20	22	695
CT-5(6)45-200	4	480	1050	1523	543	275	553	285	1278	290	330	300	470	37.5	50A	100	470	400	25	M20	22	710
CT-5(6)55-200	4	480	1265	1778	585	289	633	285	1372	290	330	300	470	-3	50A	100	470	400	25	M20	22	860
CT-5(6)22-250A	4	520	1100	1543	585	289	630	330	1449	320	370	380	530	-3	50A	100	470	400	25	M20	33	680
CT-5(6)30-250	4	520	1100	1543	585	289	630	330	1449	320	370	380	530	-3	50A	100	470	400	25	M20	33	740
CT-5(6)37-250	4	520	1100	1543	585	289	630	330	1449	320	370	380	530	-3	50A	100	470	400	25	M20	33	785
CT-5(6)45-250	4	520	1100	1543	585	289	630	330	1449	320	370	380	530	-3	50A	100	470	400	25	M20	33	780
CT-5(6)55-250	4	520	1268	1778	585	289	630	330	1449	320	370	380	530	-3	50A	100	470	400	25	M20	33	900
CT-5(6)75-250	4	520	1268	1778	585	289	630	330	1449	320	370	380	530	-3	50A	100	470	400	25	M20	33	920
CT-5(6)30-300A	4	800	1260	1703	670	336	697	410	1666	500	600	550	700	140	65A	125	570	500	32	M20	175	865
CT-5(6)37-300A	4	800	1260	1703	670	336	697	410	1666	500	600	550	700	140	65A	125	570	500	32	M20	175	890
CT-5(6)45-300A	4	800	1425	1938	670	336	697	410	1666	500	600	550	700	140	65A	125	570	500	32	M20	175	1010
CT-5(6)55-300A	4	800	1425	1938	670	336	697	410	1666	500	600	550	700	140	65A	125	570	500	32	M20	175	1030
CT-5(6)75-300A	4	800	1475	1985	786	394	797	410	1824	500	600	550	700	140	65A	125	570	500	32	M20	175	1050
CT-5(6)30-350A	4	900	1425	1758	670	336	730	430	1741	530	650	600	750	125	80A	180	740	670	37	M24	170	925
CT-5(6)37-350A	4	900	1425	1758	670	336	730	430	1741	530	650	600	750	125	80A	180	740	670	37	M24	170	950
CT-5(6)45-350A	4	900	1545	2055	800	400	780	430	1855	530	650	600	750	110	80A	180	740	670	37	M24	170	1070
CT-5(6)55-350A	4	900	1545	2055	800	400	780	430	1855	530	650	600	750	110	80A	180	740	670	37	M24	170	1120
CT-5(6)75-350A	4	900	1545	2055	800	400	780	430	1855	530	650	600	750	110	80A	180	740	670	37	M24	170	1140
CT-5(6)93-350A	4	900	1740	2280	850	425	780	430	1880	530	650	600	750	110	80A	180	740	670	37	M24	170	1510
CT-5(6)150-350A	4	900	1880	2410	885	450	830	430	1955	530	650	600	750	110	80A	180	740	670	37	M24	170	1970
CT-5(6)37-400B	4	1050	1550	2060	750	360	580	600	1878	500	600	800	950	55	80A	180	740	670	37	M30	233	1170
CT-5(6)45-400B	4	1050	1565	2075	800	400	620	600	1958	500	600	800	950	55	80A	180	740	670	37	M30	233	1220
CT-5(6)55-400B	4	1050	1565	2075	800	400	620	600	1958	500	600	800	950	55	80A	180	740	670	37	M30	233	1360
CT-5(6)75-400B	4	1050	1710	2250	850	425	645	600	2008	500	600	800	950	5	80A	180	740	670	37	M30	233	1650
CT-5(6)110-400A	4	1050	1565	2075	800	400	620	600	1958	500	600	800	950	55	80A	180	740	670	37	M30	233	1750
CT-5(6)150-400A	4	1050	1710	2250	850	425	645	600	2008	500	600	800	950	5	80A	180	740	670	37	M30	233	2050
CT-5(6)55-500B	4	1400	1770	2280	990	500	950	800	2588	800	1000	800	1100	240	100A	200	1000	700	50	M36	250	1850
CT-5(6)110-500B	4	1400	1960	2500	1215	515	1000	800	2938	800	1000	800	1100	200	100A	200	1000	700	50	M36	250	2000
CT-5(6)150-500B	4	1400	2080	2630	1042	540	1000	800	2938	800	1000	800	1100	200	100A	200	1000	700	50	M36	250	2300
CT-5(6)220-500B	4	1400	2200	2750	1042	540	1000	800	2938	800	1000	800	1100	200	100A	200	1000	700	50	M36	250	2850

外型尺寸圖 (DIMENSIONS)

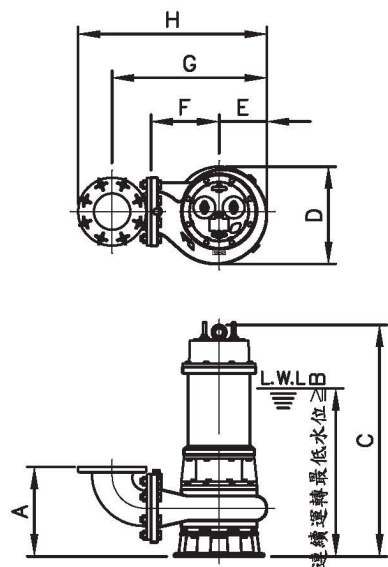


FIG.1

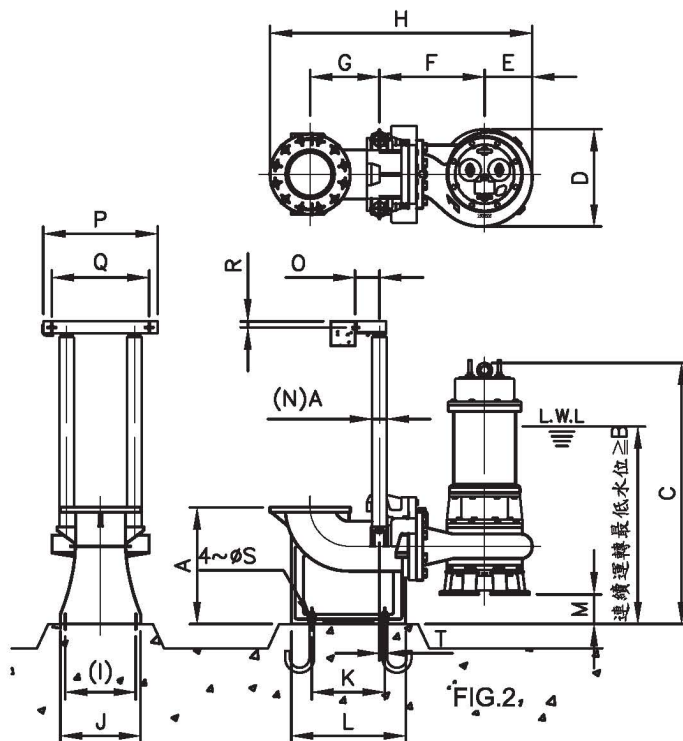


FIG.2

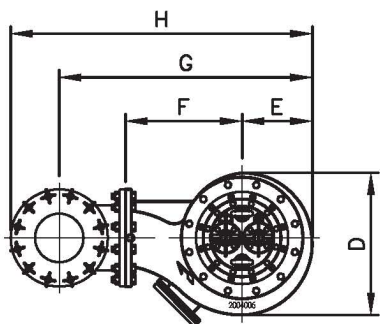


FIG.3

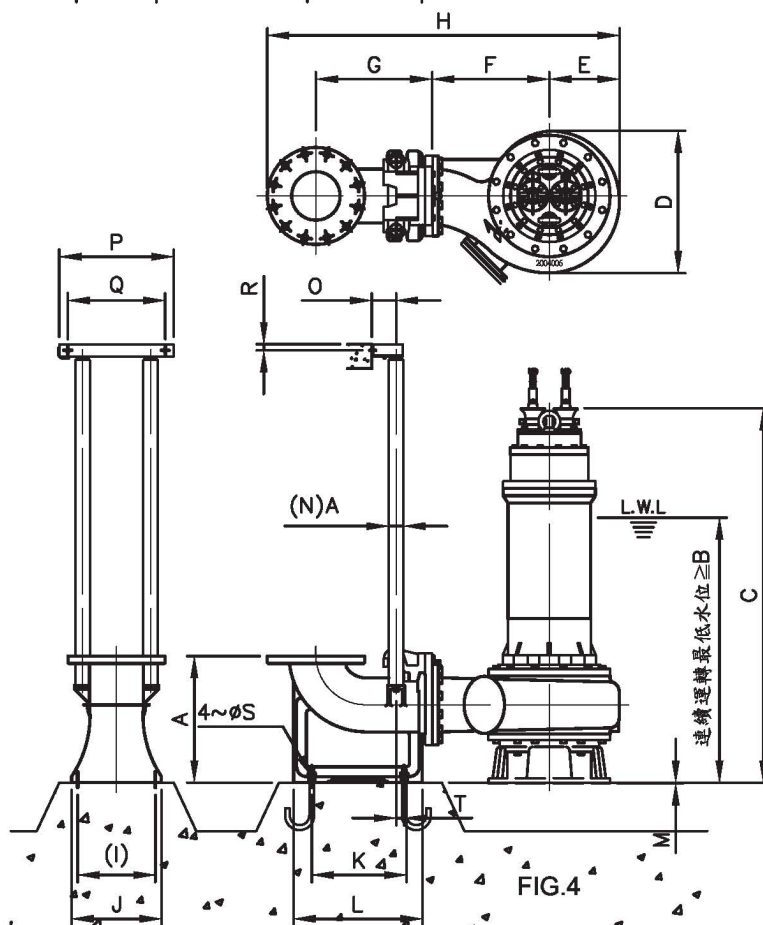


FIG.4

註："L.W.L." 為最低使用水位

● PS："L.W.L." means the lowest water level

經銷商

※以上性能以外之需求，可依客戶需求製作

※本型錄內容如有變更恕不另行通知
Contents of the catalogue are subject to change without notice